


GCH-T

系列防水防尘工矿灯



型号含义 Model implication

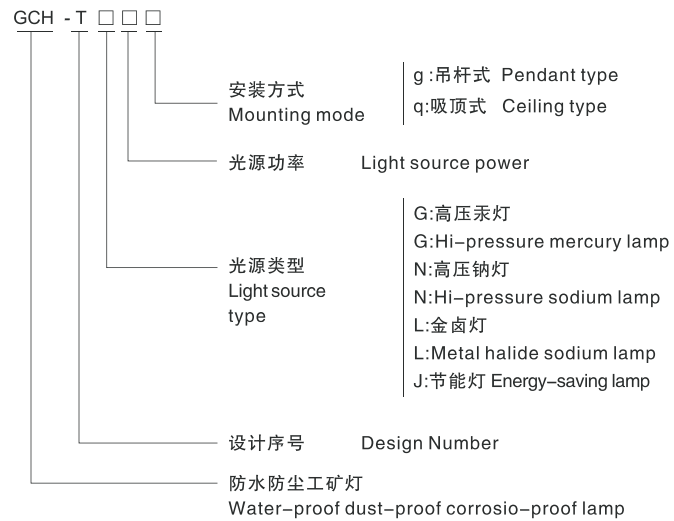

使用环境 Environmenr conditions

- 环境温度-25° C至+55° C;
- 安装高度不超过海拔2000m;
- 适用于多水、多尘、潮湿等环境;
- 广泛用于石油、化工、码头、食品、制药、军工等工厂企业，安装高度4~8m，作为厂房、仓库照明，尤其是积尘大的车间照明。

- Ambient temperature is -25° C to +55° C.
- The height of installment can't over 2000 meters above sea level.
- Be applicable to chloridion corrosion, wateriness, dustiness, moisture and other environments;
- They are widely used in the lines of petroleum, chemistry, dock, food medicine, war industry and so on, mounting height is 4~8m It is used in the illumination of factory. Warehouse, especially the illumination of the workshops with much dust.

GCH-T


Type water-proof dust-proof factort-minelamp

产品特点 Features

- 本系列灯具由铝合金镇流器箱、灯座及聚碳酸酯灯体组成，外形美观；
 - 聚碳酸酯灯体具有反光效果，配光曲线合理，光强分布均匀，是理想的照明灯具；
 - 各接合面均有密封垫，具有很好的防水防尘能力，防护等级IP65；
 - 镇流器、触发器与灯一体安装，使安装使用更方便。
- The light appliance is made of aluminium alloy ballast box, lamp socket and polycarbonate body with nice appearance.
 - The polycarbonate body is better lamp appliance for illumination with reflector effector, renal distribution curve, symmetrical light intensity
 - There are sealing rings is joint surface, wiht good water-proof and dust-proof, the protection grade reaches Ip65.
 - Ballast, trigger and lamp installation of integrative type which is more convenient for mounting mounting and using.

技术参数 Technical parameters

类型 type	额定电压(V) Rated voltage	额定功率(W) Rated power	防护等级 Protectoion grade	防腐等级 Corrosion-proof grade	灯座规格 Lamp spec	电缆规格 (Φ,mm) Cable' s spec	进线口规格(G') Inlet' spec.
GCH-T□□	AC220	≤G400 ≤N400 ≤L400 ≤Z450 ≤J120	IP65	WF1	E27/E40	9~14	3/4

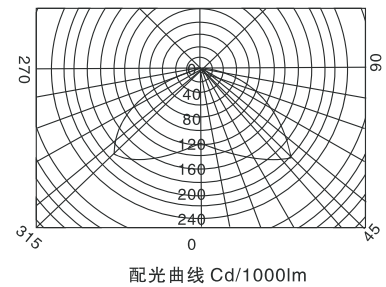

订货须知 Ordering references

- 订货时请注明产品的完整型号；
- 本产品出厂时不配光源，由用户自备。
- Provide complete ordering products type.
- Without providing the illuminant of lamp appliance.

[www. peopleex. cn](http://www.peopleex.cn)